

Technical data

Drain plugs

Aluminium magnetic drain plug

TKM is a range of aluminium compact plugs for draining of the fluid from the systems during the commissioning and maintenance procedures. They are usually directly fitted on the bottom of the tank. The integrated magnet holds the ferrous contamination.

Available features:

- Male threaded connections up to G 1"

Common applications:

- Hydraulic systems
- Mobile machines
- Industrial equipment

Materials

- Body: Aluminium
- Seal: Inorganic fibre

Temperature

From -25 °C to +100 °C

Weight

TKMG13 14 g
TKMG16 23 g
TKMG20 42 g
TKMG26 95 g
TKMG33 98 g

Quantity

1 pc/pack



Designation & Ordering code

DRAIN PLUG - TKM

Series and size

TKM

Configuration example: **TKM** **G20** **B** **P01**

Connections to the tank

G13 Thread G 1/4"

G16 Thread G 3/8"

G20 Thread G 1/2"

G26 Thread G 3/4"

G33 Thread G 1"


Seals

B Inorganic fiber

Execution

P01 MP Filtri standard

Pxx Customized

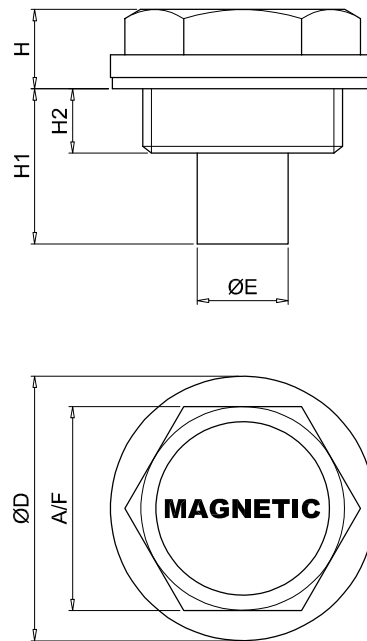

Connection	ØD [mm]	A/F [mm]	ØE [mm]	H [mm]	H1 [mm]	H2 [mm]
G13	19	15	9.5	6	11.5	5.5
G16	22	18	8	9.5	13.5	7.5
G20	28	22	10	9.5	15.5	7.5
G26	35	27	12	10.5	20.5	8.5
G33	42	34	25	13	30.5	10.5