


Heads

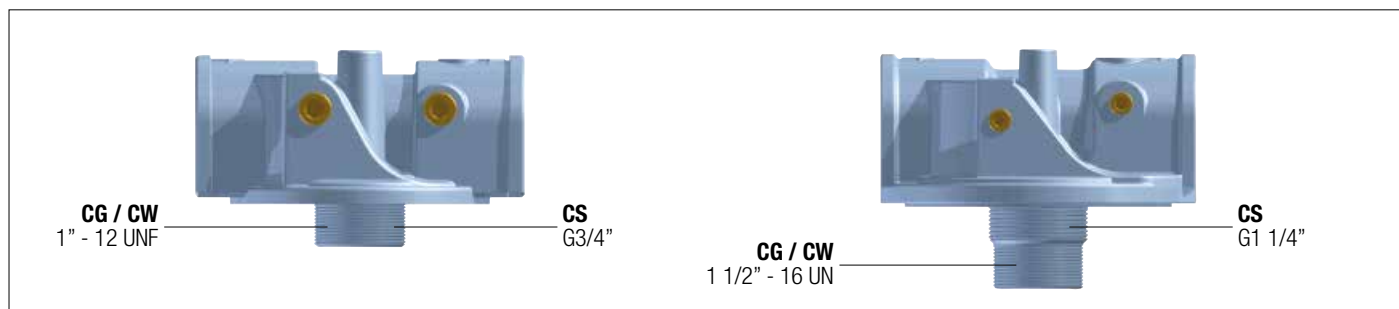


Cartridge

<p>CS 050 - 070 - 100 - 150</p> <p>CG - CW 050 - 070</p> 	<p>CG - CW 100 - 150</p> 	<p>CW</p> <p>This series of cartridge removes water from oil while filtering the oil at the same time. Water absorbent polymers up to 800 times their own weight provide this major feature.</p> <p>Water holding capacities: CW 050= 240 ml Ordering code: CW050P10AP01</p> <p>CW 150= 788 ml Ordering code: CW150P10AP01</p>
---	---	--

Thread connections	
Element	Connection
CS 050 - 070	G3/4"
CS 100 - 150	G1 1/4"
CG / CW 050 - 070	1" - 12 UNF
CG / CW 100 - 150	1 1/2" - 16 UN


Water holding capacities CW		
	good	poor
Viscosity	30/46 mm ² /s (cSt)	> 46 mm ² /s (cSt)
H₂O p.p.m.	600/800 p.p.m.	> 800 p.p.m.
Flow rate	CW050 7/15 l/min CW150 20/40 l/min	CW050 > 20 l/min CW150 > 50 l/min
Temperature	40/60 °C	< 30 °C

CT



Thread connections	
Type	Connection
CT 050 - 070	G3/4"
CT 100 - 150	G1 1/4"

CH



Thread connections	
Type	Connection
CH 050 - 070	M32 x 2
CH 100 - 150	M45 x 2