

Technical data

Air breathers & Filler plugs

Metal oil filler and air breather filler cap Flow rate up to 200 l/min

TA46 is a range of compact metal air breathers and filler caps for protection of the tank against the solid contamination contained into the air and filling of the fluid into the systems during the commissioning and maintenance procedures. They are usually directly fitted on the tank. The robust design allows the use of these filters in any heavy-duty application.

Available features:

- Male threaded connections up to 1/4" and flanged connection with bayonet, for a maximum flow rate of 200 l/min
- Fine cellulose filtration, to get a good cleanliness level into the reservoir
- Filling basket, to hold the coarse contamination contained into the fluid and to diffuse the fluid flow into the tank

Common applications:

- Compact hydraulic systems
- Compact mobile machines
- Industrial equipment

Flow rate Δp 0.02 bar

TA46	Flow rate [l/min]	
	Filtration rating 03	10
	150	200

Materials (version G/N)

- Cover: Chrome plated steel
- Filter element: Resin impregnate paper, Polyurethane
- Flange: Galvanized steel
- Connection: Phosphatized steel

Materials (version B)

- Cover: Chrome plated steel
- Filter element: Resin impregnate paper, Polyurethane
- Flange: Galvanized steel
- Connection: Phosphatized steel
- Seals: NBR
- Chain, ring: Cork gasket
- Screws: Galvanized steel
- Basket: Brass

Temperature

From -25 °C to +100 °C

Weight

TA 46 B 0.10 kg
TA 46 G/N 0.11 kg




Designation & Ordering code

COMPLETE AIR BREATHER - TA46

Series and size	Configuration example 1:	TA46	B	03	A	0	0	1	P01
TA46	Configuration example 2:	TA46	G	10					P01
Connections to the tank									
B	Screwed flange with bayonet mount								
G	Thread G 1/4"								
N	Thread 1/4" NPT								
Filtration rating									
03	Resin impregnate paper	3 μ m							
10	Polyurethane	10 μ m							
Seals									
A	NBR	•							
Valve									
0	Without valve	•							
Version									
0	Standard	•							
Basket									
1	With basket	•							
Execution									
P01	MP Filtri standard								
Pxx	Customized								


TA46

Screwed flange

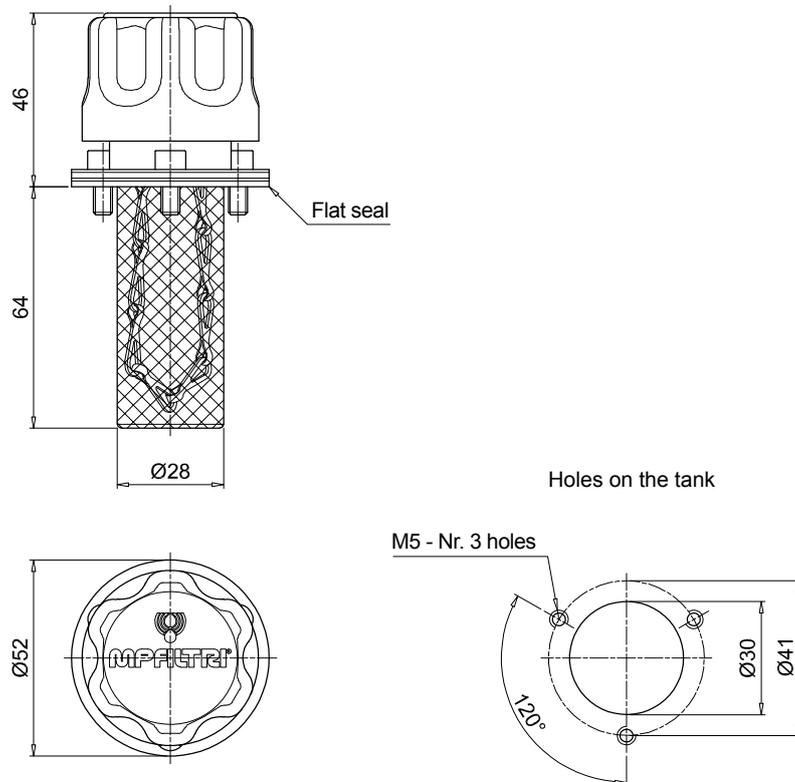

TA46

Threaded connection

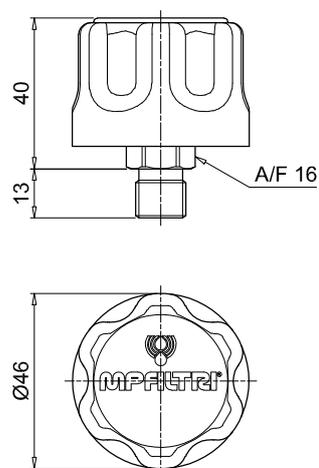

TA 80 GENERAL INFORMATION

Technical data

Air breathers & Filler plugs

Metal oil filler and air breather filler cap Flow rate up to 550 l/min

TA80 is a range of metal air breathers and filler caps for protection of the tank against the solid contamination contained into the air and filling of the fluid into the systems during the commissioning and maintenance procedures.

They are usually directly fitted on the tank. The robust design allows the use of these filters in any heavy-duty application.

Available features:

- Male threaded connections up to 3/4" and flanged connection with bayonet, for a maximum flow rate of 550 l/min
- Fine cellulose filtration, to get a good cleanliness level into the reservoir
- Pressurization valve with different setting, to guarantee a positive pressure into the tank in any application with metal or plastic tanks
- Padlock tab, to secure the air breather to the tank
- Filling basket, to hold the coarse contamination contained into the fluid and to diffuse the fluid flow into the tank

Common applications:

- Hydraulic systems
- Mobile machines
- Industrial equipment

Flow rate Δp 0.02 bar

TA80	Flow rate [l/min]	
	Filtration rating 03	10
	450	550

Materials

- Cover: Chrome Plated steel
- Filter element: Resin impregnate paper, Polyurethane
- Pressurization valve: Nylon (bodies), Galvanized steel (end cap - disk), Steel (spring), NBR (seals)
- Flange and anti-splash feature: Galvanized steel
- Seals: Cork Gasket, NBR
- Screws, Flange: Galvanized steel
- Chain, Ring: Brass
- Basket (only TA80B): Galvanized steel

Temperature

From -25 °C to +100 °C

Weight

L 80 mm 0.33 kg
L 150 mm 0.35 kg




Designation & Ordering code

COMPLETE BREATHER PLUG - TA80

Series and size	Configuration example 1 :								
TA80	TA80	B	03	A	0	L	1	P01	
	Configuration example 2 :								
	TA80	G	10	A	2			P01	
Connections to the tank									
B Screwed flange with bayonet mount	G Thread G 3/4"								
D Weld flange with bayonet mount	N Thread 3/4" NPT								
Filtration rating	Connection:	B	D	G	N				
00 Without filter (blind filler plug)		•	•	•					
03 Resin impregnate paper 3 µm		•	•	•	•				
10 Polyuretane 10 µm		•	•	•					
Seals									
A NBR									
Valve	Filtration rating:	00	03	10					
0 Without valve		•	•	•					
1 0.3 bar pressurization valve		•	•	•					
2 0.7 bar pressurization valve		•	•	•					
9 With anti-splash feature				•					
Version	Connection:	B	D	G	N				
0 Standard		•	•						
L With padlock tab		•							
Basket	Connection:	B	D	G	N				
0 Without basket		•	•						
1 L = 80 mm		•							
3 L = 100 mm			•						
Execution									
P01 MP Filtri standard									
Pxx Customized									

TA80
Screwed flange

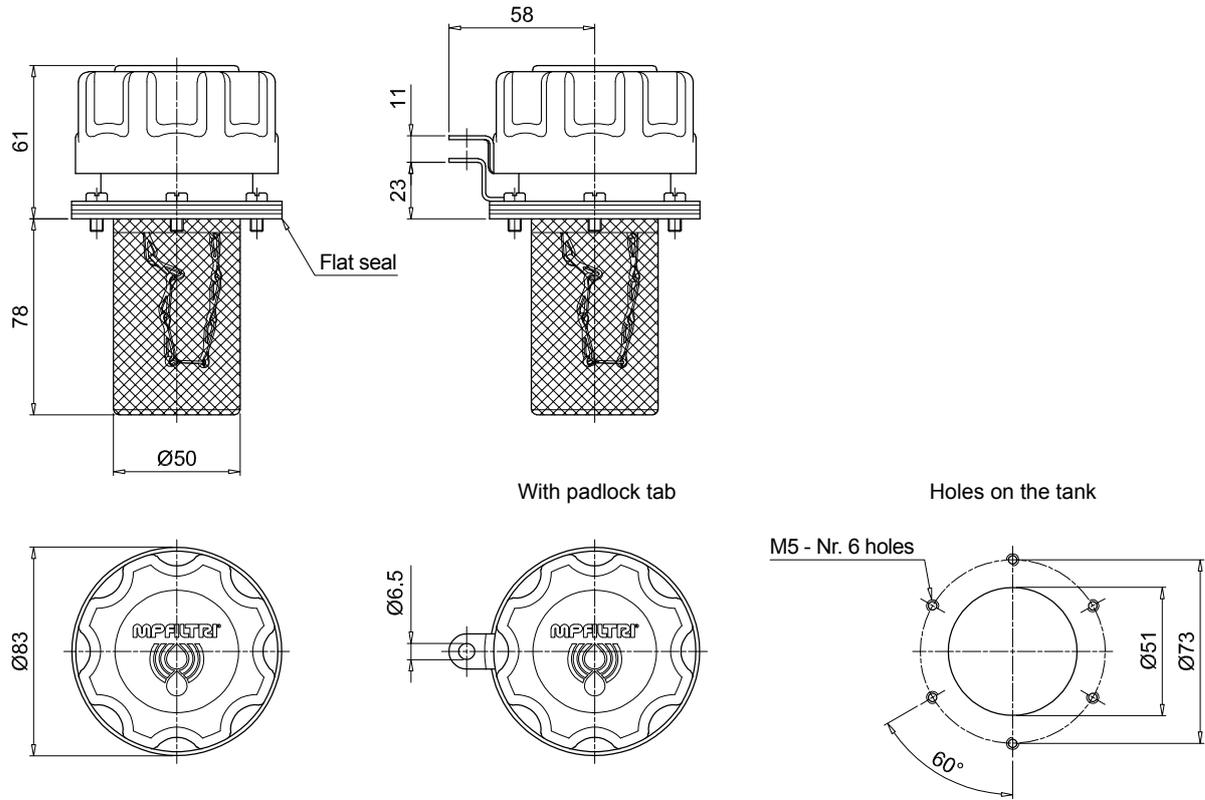

TA80
Weld flange
Threaded connection

